


Installation Guide For HyPanel Pro



Smarter Home
Sweeter Life

Welcome!

This guide applies to the following models of HyPanel Pro:
PG71-R2-EU and PG71N-R2-EU.

Contents

- Before We Start 2
- In the Box 3
- Check Compatibility 4
- Wiring 7
- Installation 12
- Get Help 19

Before We Start

Your first time installing this product may take up to 40 minutes. You'll get faster after each installation.

Warning!


The installation procedure involves handling high voltage wiring. Please be careful. To avoid serious personal injury, death, or property damage, turn OFF the power to the circuit and follow all safety precautions before proceeding.

Working with electricity can be dangerous. If you are unsure about, or uncomfortable with the installation, seek the help of a qualified electrician.


Warning!

Keep the device and all its parts out of the reach of children. The small parts or accessories contained may be a choking hazard to them.


In the Box

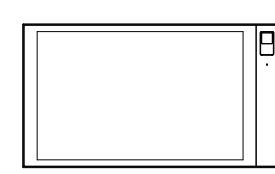


HyPanel Pro x1

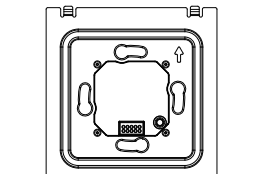


Flush Mounted Module x1



Hex Key x1




M2x20mm Philips Self-Tagging Screw x2



M2x20mm Philips Machine Screw x2


Check Compatibility

Product dimensions

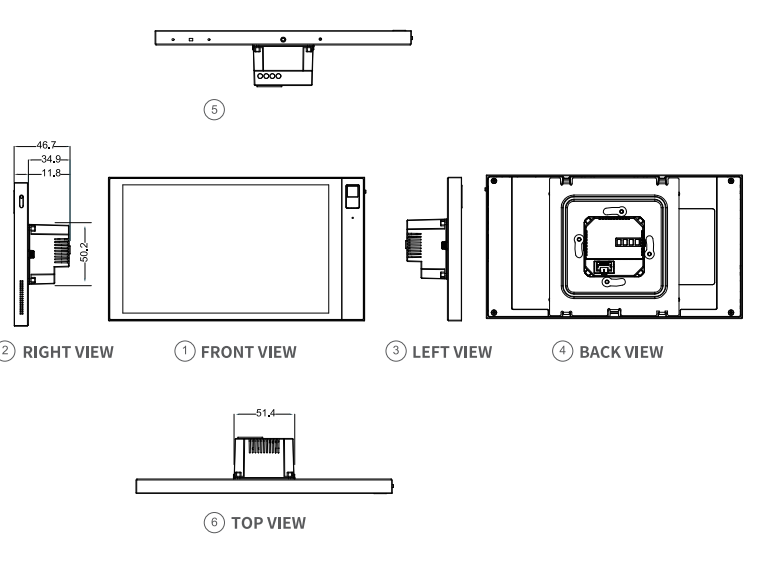

Connect all wires


Always make sure the arrow on the front of the flush mounted module is pointing up.

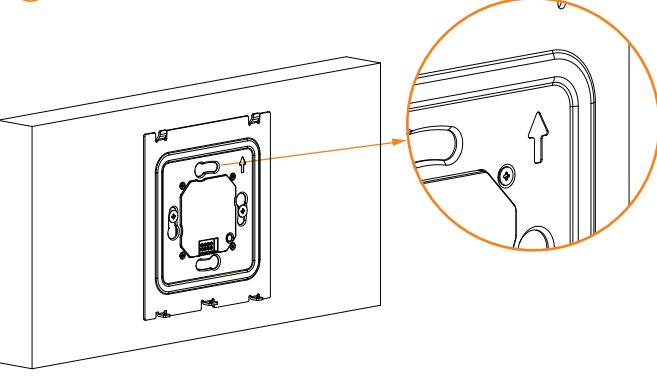

Installation


1. Select screws

- Select the proper screws fitting your electrical box.
- Change the torque on the electric screwdriver to 5kgf.cm.
- Turn screws clockwise with the screwdriver.
- Do not fully tighten the screws. The screw head must protrude at least 3 mm (1/8 inch) from the wall surface.

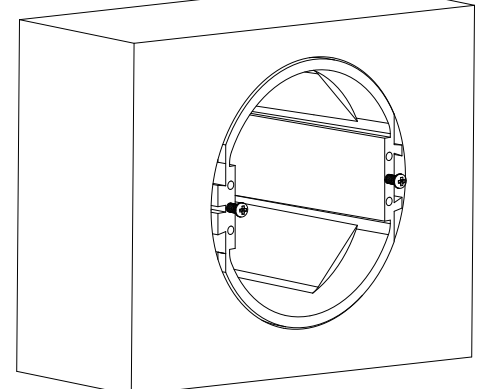


2. Install flush mounted module

- Attach the flush mounted module to the electrical box. The screws should go through the holes on the module.

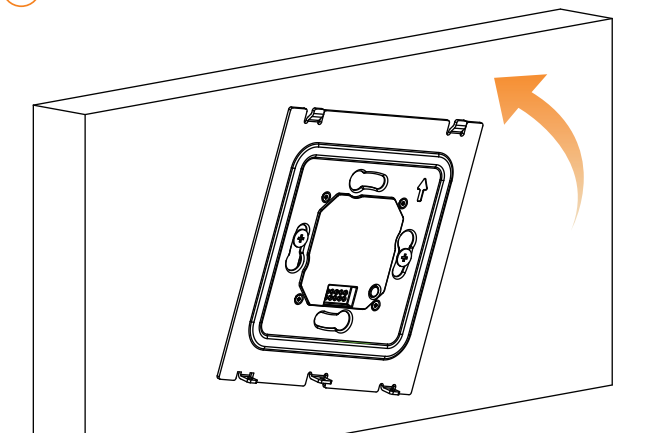


Adjust the module to be level and ensure it is flush against the wall.

- Tighten the screws to attach the module to the wall, taking care not to over-tighten them.

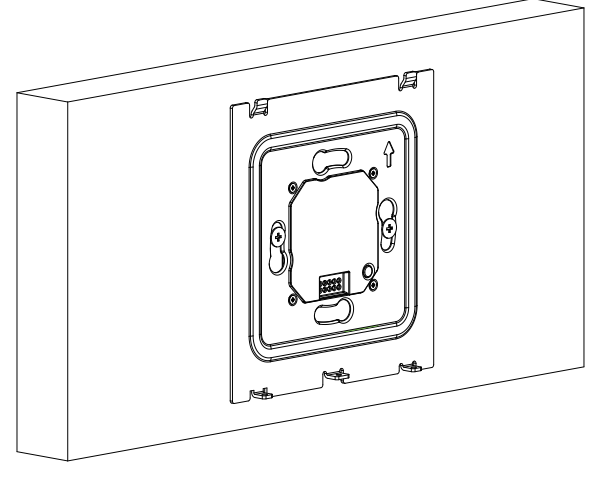

Working space

Make sure HyPanel Pro is compatible with the location where you want to install it.

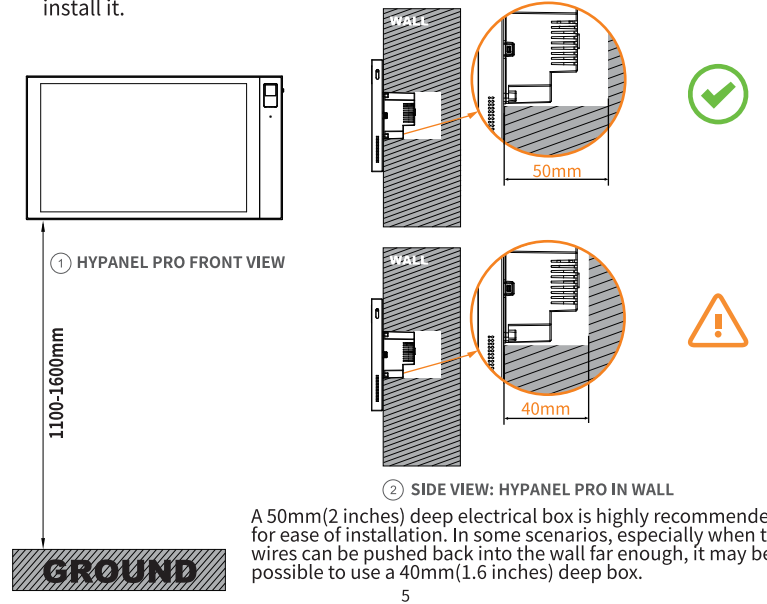

1. SIDE VIEW: HY-PANEL PRO IN WALL

A 50mm (2 inches) deep electrical box is highly recommended for ease of installation. In some scenarios, especially when the wires can be pushed back into the wall too deeply, it may be possible to use a 40mm (1.6 inches) deep box.

Maximum load

- The total load of the device(s) connected to HyPanel Pro must be less than 1200W (Max load).
- The wattage of a resistive load appliance, e.g., an incandescent bulb, must be less than 800W.
- The wattage of a LED lamp or compact fluorescent lamp (CFL) must be less than 400W.
- You must check the load compatibility before connecting other types of devices that are not mentioned above.

180V-260V AC/50 Hz power required

If you are in the 110V country or region, you have to use an isolation transformer to step up 110V voltage to 180V-260V before it can be used for HyPanel Pro.

Neutral wire required for installation

A neutral wire is required for the device to function properly.

Support Wi-Fi and Ethernet connections


HyPanel Pro can operate with both wireless and wired networks, but we highly recommend using wired networks if you want to remotely control the device via the BelaHome app or perform updates.

Wiring

Warning!

Turn OFF the circuit breaker before wiring and proceeding!
Always use a voltage detector to verify the power is OFF before wiring and installation!


Identify wires

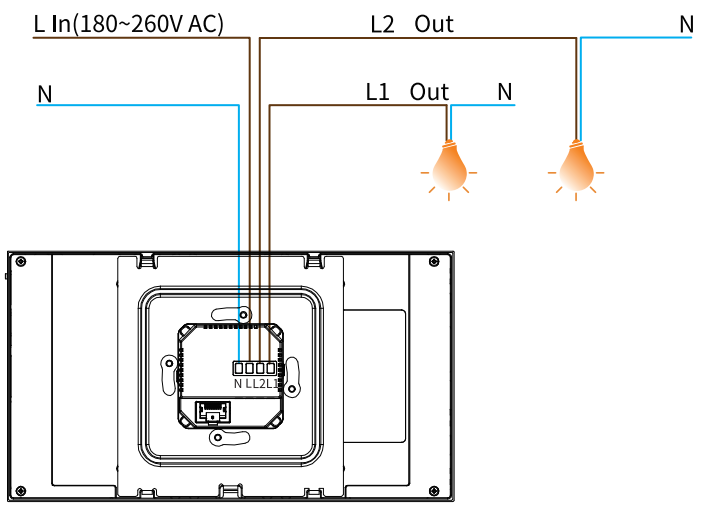

- A Neutral wire (N) typically comes from the wall.
- The Line wire (L) provides 180-260 Volts of power to the HyPanel Pro.
- L1 and L2 are Load wires that connect the HyPanel Pro to the light bulbs or other devices, e.g., fans or curtain motors.


Connect wires

1. Strip and straighten wires

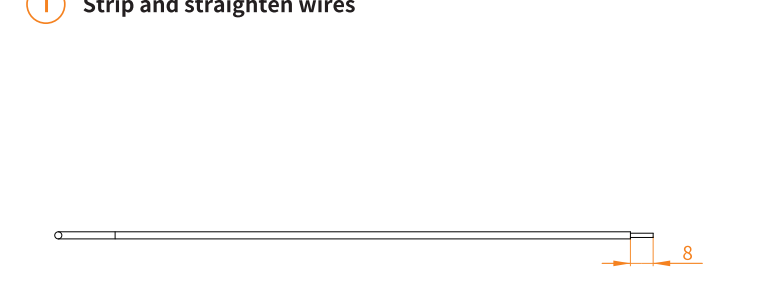

Wires connected to HyPanel Pro should be 1.5mm² - 2.5mm² in size and have stripped and straight ends.
Remove the plastic sheathing of the wire, and make sure the exposed wire ends measure approximately 8 mm (2/16 inch) in length.

Test connected devices

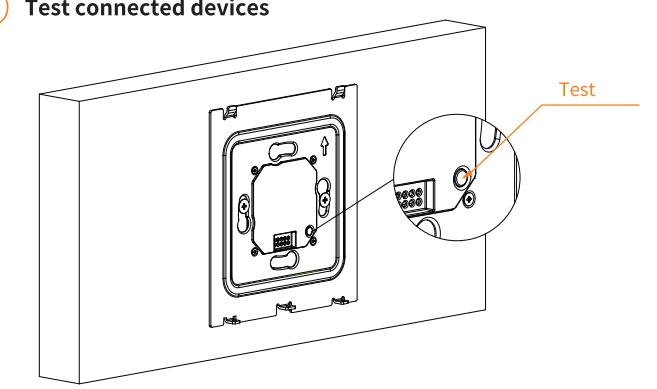


- Turn on the circuit breaker to provide power to the flush mounted module.
- Press the button at the bottom right to check if the connected devices can work.
- Press the button once, one connected device (Relay 1) will be turned on/off.
- Double-press the button, the other device (Relay 2) will be turned on/off simultaneously.
- Long-press the button, two connected devices will be turned on/off.

If the devices do not turn on/off, do NOT install the panel. Turn the power off and re-check the wire connections.

Install panel

After installing the flush mounted module, you can start securing the panel.

Turn OFF the circuit breaker before you install the panel.

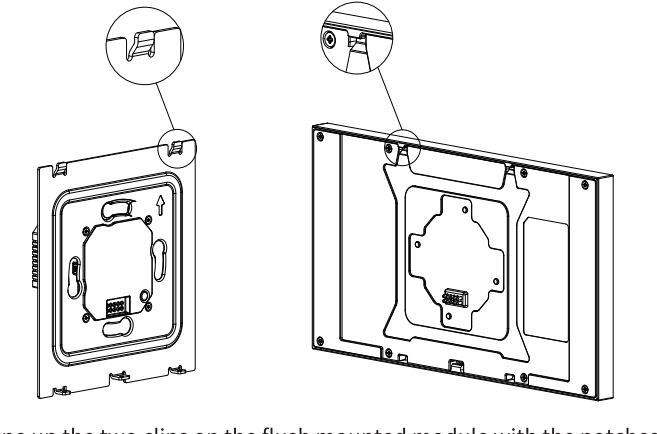

Line up the two clips on the flush mounted module with the notches on the panel. Snap the panel into place and press it down.

Check the panel

- Check the panel is properly clipped onto the module and is flush against the wall.
- Locate the screw hole on the bottom of the panel. There is a screw already in it.
- Tighten the screw with the included hex key.

If you need to remove the panel

We strongly recommend detaching a panel from the screwing side.

1. Turn the screw with the hex key until the rear edge of the panel come loose.
2. Press one hand above the panel on the top, and then grab and pull out the panel with the other hand from the bottom edge.

Congratulations!

You are done with the HyPanel Pro installation!
Start your smart home journey with Akubela now!

Get Help

For help or more assistance, contact us at: <https://ticket.akuvox.com/>
For videos, guides, and additional product formation, visit us at: <https://knowledge.akuvox.com>

