


B2C Platform - FireAngel Connected



De B2C Gateway is bestemd voor kleinere draadloze Wi-Safe 2 netwerken waarbij de gebruiker/gebouweigenaar zelf in staat is om de rookmelders te onderhouden. Een onderhoudsregime is - net als bij brandmeldcentrales- een essentieel onderdeel van de installatie. EN14604 rookmelders moeten altijd werken bij brand. Ongeacht of er nog stroom of internet aanwezig is. Bij een ongewenste melding is het systeem uit te schakelen door op de pauzeknop te drukken van 1 van de rookmelders. De app geeft aan om welke melder het gaat. Dit om voorkomen dat het hele systeem op afstand uitgezet wordt, terwijl er in het gebouw nog bewoners aanwezig zijn.

De installatie gaat via de app, zorg er voor dat je mail kunt ontvangen op de telefoon.

- 1- Sluit de gateway aan op uw router
- 2- Plaats de adaptor in het stopcontact
- 3- Wacht tot alle 3 de leds branden = 2 x groen & 1 x rood.
- 4- Dit kan wel 15 duren!! trek nooit de stekker er uit.
- 5- Download de FireAngel Connected App (B2C)
- 6- Ga in de App naar Sign-Up

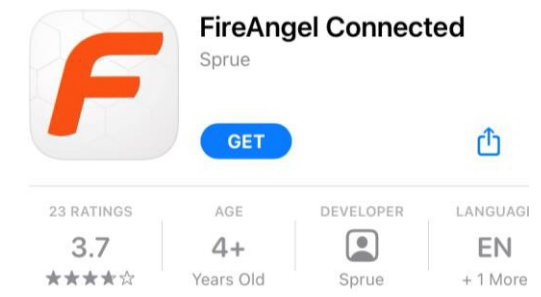



Nog geen account => Eerst naar SIGN-UP

Login

Login to get started and access the app

Forgotten Password

Users can create a new password using the 'Forgotten Password' link.

Forgotten Username

Users can retrieve their forgotten username using the 'Forgotten Username' link

Sign Up

Users can create a new account





How to sign up?

Sign up/Verify

FireAngel Register an account

Register

Username

Password

Confirm Password

E-Mail

Register

Verify your account

We have sent you an email, follow the link within to verify your account

Verify via email

Fulfil Account Details

FireAngel Register a new Account

Edit your details below:

First Name

Last Name

Telephone

Email

Account Address

You can enter an alternative installation address later

Login Successful

FireAngel

Your Address 1

Your Address 1

+ Add New

Edit

Add Additional Gateways
Supported Countries:
Germany, UK, Netherlands

Switch Gateway / Address
Allows monitoring of alarm conditions for your family and friends

How to learn in the gateway?



Learning in the Gateway



Step 1

Plug in the Gateway with the power and Ethernet Cable

Step 2

Wait for the red indicator light to show

Power Notification Connected to the internet

Step 3

Enter the MAC Address, located on the back of your Gateway.

MAC Address

Gateway Connecting



Searching for Gateway

5% complete



Gateway found

35% complete



Linking...

70% Linked the gateway to current installation



Gateway Connected

100% complete

Connection Success

Your Address

1 Device Linked to your network

Gateway
Add Location
New Device Detected

+ Add New Device

Learning in New Device

Personalise Device Location


I.e. living room or bed room for easy identification

Om de eerste melder in te leren op de gateway druk je op de inleerknop van de Gateway en vervolgens druk je binnen 5 sec op de testknop van rookmelder. Zorg er voor dat de montageplaat onder de rookmelder zit. Denk om je oren. De melder verschijnt in de APP.

Geef de melder een naam/lokatie. Leer daarna pas de volgende melder. Dit doe je op de melder die al in de app staat (Master)

How to learn in new devices?

Create a New Network

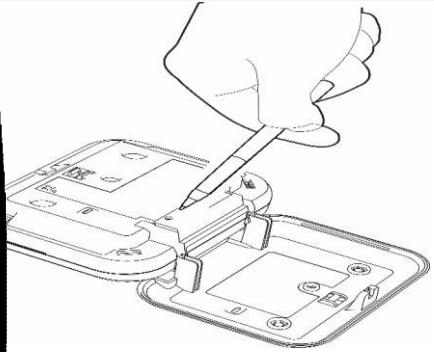

Refer to 'Learning in' video



Connect Gateway to the Network



Step 1.

Put the device being learned back on base (if applicable)




Step 2.

Put the gateway into 'Learn Mode' by pressing the 'Continue' button. The gateway light will illuminate for 5 seconds. During this 5 seconds please press the test button on the device that is being added. If successful the gateway light will flash 3 times. If not then please select 'Add New Device' to repeat the process.

Continue

Gateway LED



Connect Success

3 Devices Linked to your network



Gateway

Add Location

New Device Detected



Carbon Monoxide Alarm

Testing in progress



Carbon Monoxide Alarm

Add Location

New Device Detected







How to manage devices?

Home Page

Welcome back, **Your User Name**
Your Address

Devices Quick overview of your alarm network



Recent Events Latest alarms activated

Event Type : Test Event
Device Name : Carbon Monoxide Alarm
Location : **Personalised Location Name** ✓
Date/Time : 25-11-2020, 17:11:25

FireAngel Predict
Calculating the risk to your property in real time using complex algorithms.

List of Devices

3 Devices Linked to your network

Gateway
Add Location
New Device Detected

Carbon Monoxide Alarm
Testing in progress

Carbon Monoxide Alarm
Add Location
New Device Detected

Manage Devices

Manage Devices

- + Add New Devices
- + Add New Gateway
- Test Network
- Sound Test

Test, Silence and Locate FireAngel devices by a simple pressing on your mobile.

1 Faulty Device

Gateway
Add Location
New Device Detected

1

How to access the function menu?



Create Contact: [Close]

Name
[Input Field]

Telephone
[Input Field]

Email
[Input Field]

Preferences

? What type of alerts should this contact receive

Fault Alert Predict

? Please Note: the contact will receive an email to register and relevant notifications from your system

By ticking this box, you confirm that you have explained to your nominated email recipient that their email address will be stored on FireAngel's systems and used for the purposes and duration described in our

Please see next slide for details

Menu Options

FireAngel [Close]

- Dashboard
- Devices
- Contacts
- Event Log
- My Account
- Predict
- About
- Logout

Event Log

Event Type	: Test Event	
Device Name	: Carbon Monoxide Alarm	✓
Location	: No Location	
Date/Time	: 25-11-2020, 17:11:25	

Event Type	: Test Event	
Device Name	: Carbon Monoxide Alarm	✓
Location	: No Location	
Date/Time	: 25-11-2020, 17:11:16	

View Historical Events Details

FireAngel Predict
Calculating the risk to your property in real time using complex algorithms.

Constantly Monitored by FireAngel Predict



How to create contacts?

Create Contact

Create Contact: [Close]

Name

Telephone

Email

Preferences

? What type of alerts should this contact receive

Fault Alert Predict


? Please Note: the contact will receive an email to register and relevant notifications from your system

By ticking this box, you confirm that you have explained to your nominated email recipient that their email address will be stored on FireAngel's systems and used for the purposes and duration described in our Privacy Notice <https://www.fireangel.co.uk/fireangel-company-policies>

Create Contact

- Users can amend account details and provide contact information.
- Receive notification of alarm activations by email

Submit Contact



Contact request sent

We have sent you an email to your new contact. Ask your contact to follow the link within to register and join the account.

Done

Delete Contact

Contacts Overview

Name	Fault	Alert	Predict	
User 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="button" value="+ Add New"/>

Name	Fault	Alert	Predict	
<input type="button" value="-"/> User 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	

Name	Fault	Alert	Predict	
User 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="button" value="Delete"/>